

DUROFLOOR

Vinyl Flooring

Luxury Flooring



**HEAVY DUTY SEMI COMMERCIAL FLEXIBLE
VINYL FLOORING**

DUROFLOOR

Vinyl Flooring

HEAVY DUTY SEMI COMMERCIAL FLEXIBLE VINYL FLOORING

Luxury Flooring




553702



553703



GREY

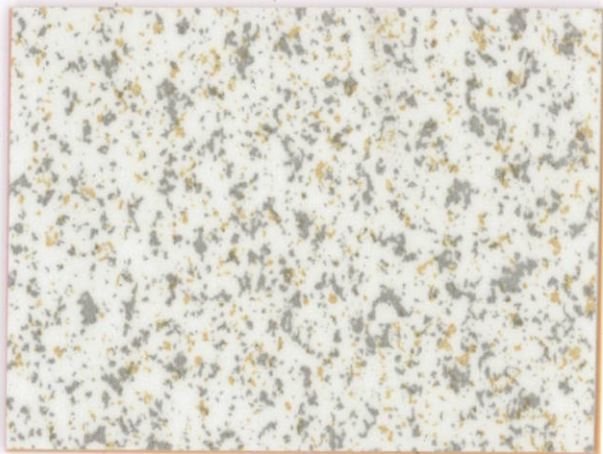

CREAM





03



04



01





DUROFLOOR
Vinyl Flooring
HEAVY DUTY SEMI COMMERCIAL FLEXIBLE VINYL FLOORING
Luxury Flooring



05



553401



553405



553402
















553404



DUROFLOOR FLOORING is a Heavy Duty Flooring ideally suggested for applications where good traction and long wearability is important. Durofloor is made by the multi layer technology consisting of the top wear layer which is specially developed and treated for maximum abrasion resistance and meeting all the performance requirements of the listed standards. The Middle and Bottom Layer complement the physical characteristics of the floor covering.

PERFORMANCE CHARACTERISTICS

 <p>THICKNESS mm EN 428 1.5 mm Other Thickness available from 1.3mm-2.0mm</p>	<p>Slip Resistance DIN 51130</p>	 <p>Sheet EN 426 2.0mm X 2mtr. X 15 mtr. = 30sq. mtr. or as per buyer specification</p>
 <p>Dimensional Stability EN 434 <0.40% (CK Quality)</p>	 <p>Residual Indentation EN 433 <0.10 mm</p>	 <p>Castor Chair EN 425 Without damage of surface according to</p>
 <p>WEIGHT EN 430 2.5 Kg/Sq. mtr.</p>	 <p>Abrasion Resistance (cc) ISO:9352 0.35 cc (max.)</p>	 <p>Fungi & Bacteria Resistance Does not favour growth</p>
 <p>Ply Adhesion (KN/M) IS: 3464:86 1.05 (min.)</p>	 <p>Light Fastness ISO 105-B02 > Blue wool standard 6</p>	 <p>Width (Mtrs.) IS:3464:86 2.0 +/- 0.10</p>
 <p>Thickness of wear layer (mm) EN 429 0.25</p>	 <p>Flexibility at Low temperature IS:3462:86 Shall not break, crack or show any other sign of failure</p>	

RECOMMENDATIONS



Adhesives

We recommend Dunlop S-78/ Fevicol Sr 998 or any equivalent rubber based adhesive for laying.



Installation

Ensure subfloor is smooth, clean, dry and structurally sound.



Application

DUROFLOOR flooring is recommended for heavy/medium traffic areas where an attractive, modern and hard wearing floor covering at low maintenance cost is required. Most suitable for Industries, Airports, Public Offices, Banks, Hospitals, Auditoriums, Schools etc. Ideal for maintaining "clean room" condition. Durofloor can also be thermowelded.



Maintenance

Occasional use of a pole mounted deck brush or a brush attachment on a low speed scrubbing machine and neutral pH cleaning solution will loosen ingrained dirt. This can then easily be removed by rinsing or mopping with a wet cloth.



Chemical Resistance

Durofloor products are normally resistant to mild diluted acids & alkalies. The surface must be cleaned immediately if concentrated acids or alkalies spill.



Manufactured By :



PREMIER POLYFILM LTD.

AGENT :-

ANOOP SINGH BAHRA TRADING CO.

P. O. BOX. 33081, SHARJAH - UAE

Tel. No. : 00971-6-5346081/82, Fax No. : 00971-6-5346083

E-mail : asb@emirates.net.ae, Website : www.asbinternational.com