

DUROFLOOR

Vinyl Flooring

HEAVY DUTY FLEXIBLE VINYL FLOORING EQUIVALENT TO BS 3261 A



EN 12345 123456789



Light Grey



Ash Grey



Ocean Blue



Marine Blue



Sea Green



Black



Beige



Almond Brown



Lily White



Citrus Yellow




Tango Orange



Terracotta





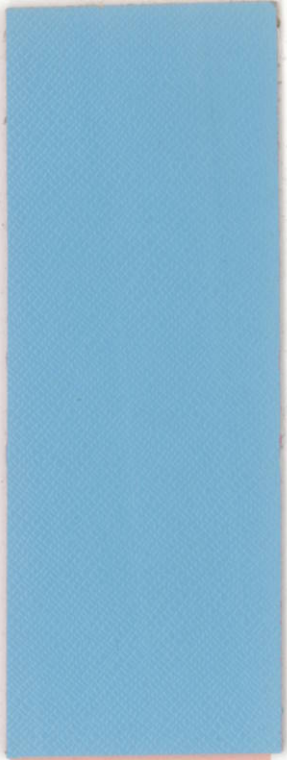














Signal Red



Carolina Blue

DUROFLOOR FLOORING is a Heavy Duty Flooring ideally suggested for applications where good traction and long wearability is important. Durofloor is made by the multi layer technology consisting of the top wear layer which is specially developed and treated for maximum abrasion resistance and meeting all the performance requirements of the listed standards. The Middle and Bottom Layer complement the physical characteristics of the floor covering.

PERFORMANCE CHARACTERISTICS

 THICKNESS mm EN 428 2.0 Other Thickness available from 1.0mm - 3.0 mm	 Tiles EN 427 305 mm X 305 mm 610 mm X 610 mm	 Sheet EN 426 2.0mm X 2mtr. X 15 mtr. = 30sq. mtr.
 Abrasion Resistance EN 660-2 EN 649 Wear Group M. (CK Quality)	 Slip Resistance DIN 51130 R-11	 Castor Chair EN 425 Without damage of surface according to EN-649 table
 Dimensional Stability EN 434 <0.40% (CK Quality)	 Residual Indentation EN 433 <0.10 mm	
 WEIGHT EN 430 3.6 Kg/Sq. mtr.	 Flammability DIN/4102	 Fungi & Bacteria Resistance Does not favour growth
 Reaction of Fire BS 476 Part 6 & Part 7 Class - 1 (Only in CK Quality)	 Light Fastness ISO 105-B02 > Blue wool standard 6	 Stain & Chemical Resistance EN 423 No visible change
 Deterioration Visibility due to smoke UIC 564 OK Appendix 15 Class B (CK Quality)	 Sound Absorption EN ISO 140-6 EN ISO 717-2  LW = 8db	

RECOMMENDATIONS



Adhesives

We recommend Dunlop S-78/ Fevicol Sr 998 or any equivalent rubber based adhesive for laying.



Installation

Ensure subfloor is smooth, clean, dry and structurally sound.



Application

DUROFLOOR flooring is recommended for heavy/medium traffic areas where an attractive, modern and hard wearing floor covering at low maintenance cost is required. Most suitable for Industries, Airports, Public Offices, Banks, Hospitals, Auditoriums, Schools etc. Ideal for maintaining "clean room" condition. Durofloor can also be thermowelded.



Maintenance

Occasional use of a pole mounted deck brush or a brush attachment on a low speed scrubbing machine and neutral pH cleaning solution will loosen ingrained dirt. This can then easily be removed by rinsing or mopping with a wet cloth.



Chemical Resistance

Durofloor products are normally resistant to mild diluted acids & alkalies. The surface must be cleaned immediately if concentrated acids or alkalies spill.



Manufactured By :



PREMIER POLYFILM LTD.

AGENT :-

ANOOP SINGH BAHRA TRADING CO.

P. O. BOX. 33081, SHARJAH - UAE

Tel. No. : 00971-6-5346081/82, Fax No. : 00971-6-5346083

E-mail : asb@emirates.net.ae, Website : www.asbinternational.com